

Knitted Wire Mesh Gaskets-Mesh Core

Description:

All mesh gasket's cross section are rectangular, round, round with tail and double round with tail. Materials are available in tin-plated phosphor bronze (Sn/Ph/Bz), tin-plated copper-clad steel (Sn/Cu/Fe), silver-plated brass (Ag/Brass), Monel, and aluminum(Al).



Ordering information:

All knitted wire mesh are supplied on spool, coils or cut to length as individual gaskets.


EMI Shielding Effectiveness:

Materials	Magnetic-field	Electric-field	Plane wave	
	100KHz	180MHz	1GHz	10GHz
	dB	dB	dB	dB
Sn/Cu/Fe	80+	130+	105	95
Su/Ph/Bz	80+	130+	110	100
Al	60	130	90	80
Monel	60+	130	90	80

Based on 127mm*127mm


Shape (Customized acceptable):

Rectangular Shape

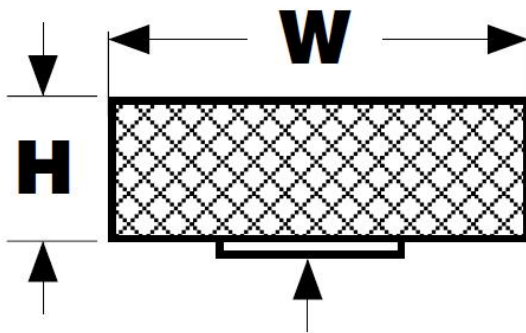


Model	Width(mm)	Height(mm)
PEWM-TCS+Neoprene16*9.5	16	9.5
PEWM-Monel+Neoprene15*15	15	15

Round With Tail

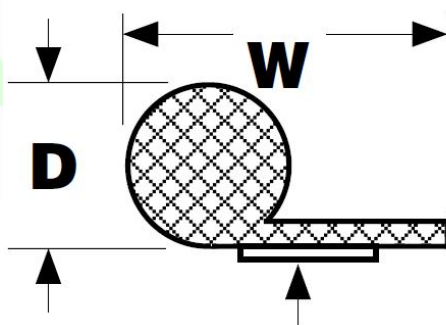


Model	Width(mm)	Diameter(mm)
PEWM-TCS10.4*9.5	10.4	9.5
PEWM-TCS11*12	11	12

Double Round With Tail

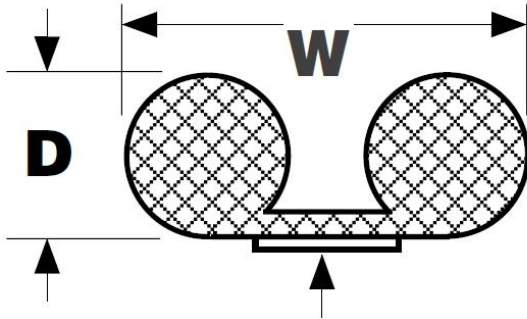

Model	Width(mm)	Diameter(mm)
PEWM-TCS6.4*25-T	6.4	25
PEWM-TCS4.8*25-50M/Roll	4.8	25
PEWM-TCS3.18*25-200M/Roll	3.18	25

Round

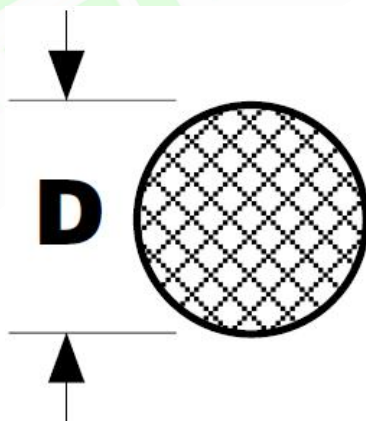

Model	Diameter(mm)
PEWM-MonelΦ3.2	3.2